

CS60

Explosion-Proof Pressure Transducer

FEATURES

- Configurable pressure ranges from 50 PSI up to 30,000 PSI
- One piece diaphragm design - No internal O-rings or welds
- Factory sealed stainless steel case - Withstands harsh environments
- IP66 rated

APPROVALS/CERTIFICATIONS

- **Explosion-Proof:**
 - ✓ CSA Class I, Division 1, Groups A, B, C, D, T4
 - ✓ Class I Zone 1 AEx db IIC T4 Gb
 - ✓ Ex db IIC T4 Gb
- **Dust Ignition-Proof:**
 - ✓ Class II, Division 1, Groups E, F and G, T135°C
 - ✓ Zone 21 AEx tb IIIC T135°C Db
 - ✓ Ex tb IIIC T135°C Db
- ANSI/UL 122701 Single Seal Certified
- CE



About the CS60

The **CS60 Explosion-Proof Pressure Transducer** is a high strength sensor designed for use in Class I, Division 1 explosion-proof locations. The CS60 features an all welded, factory sealed stainless steel construction, offering a minimum IP66 rating. A 1/2" Male NPT conduit fitting with 2 meters of 20AWG flying leads is standard, allowing for easy installation of rigid metal conduit. A wide operating temperature range and configurable design makes the CS60 a versatile pressure transducer that was engineered to operate in some the harshest conditions. Available output signals include 1-5V and 4-20mA loop-powered. The CS60 is an excellent solution for applications such as well head pressure measurement, natural gas compressors and oil exploration.



Great For...

- Well head pressure measurement
- Marine and offshore equipment
- Oil exploration
- Natural gas compression
- Pipeline equipment
- Power generation

SPECIFICATIONS

Performance

Accuracy @ 25°C: *	≤ ± 0.25% BFSL ≤ ± 0.5% BFSL (>10,000 PSI)
Stability (1 Year):	≤ ±0.25% of FS
Pressure Cycles:	100 million
Overpressure:	2X minimum
Burst Pressure:	5X or 60,000 PSI, whichever is less

* Accuracy includes non-linearity, hysteresis and non-repeatability

Thermal

Operating Temperature:	-40 to +85°C
Media Temperature:	-40 to +120°C
Compensated Temperature:	-15 to +65°C
Storage Temperature:	-40 to +125°C
TC Zero:	≤ ± 1% of FS ≤ ± 2% of FS (500 PSI and below)
TC Span:	≤ ± 1% of FS ≤ ± 2% of FS (500 PSI and below)

Environmental

EMI/RFI Protection:	Yes
IP Rating:	IP66
Vibration:	10g, 20 to 2000Hz
Shock:	100g, 11msec, 1/2 sine

DIMENSIONS

*Dimensions are for reference only



Electrical (Current)

Outputs:	4-20mA
Excitation:	10-28VDC
Current Consumption:	20mA, typical
Output Load:	0-800 Ohms @ 10-28VDC
Frequency Response (min):	~250Hz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max


Electrical (Voltage)

Outputs:	1-5V, 1-6V
Excitation:	10-28VDC
Current Consumption:	<10mA
Output Load:	5K Ohms, min
Frequency Response (min):	~1kHz
Zero Offset (of FS):	≤ ± 0.5% typical ± 1% max
Span Tolerance (of FS):	≤ ± 0.5% typical ± 1% max

For wiring information, visit core-sensors.com/wiring



MODEL NUMBER CONFIGURATION

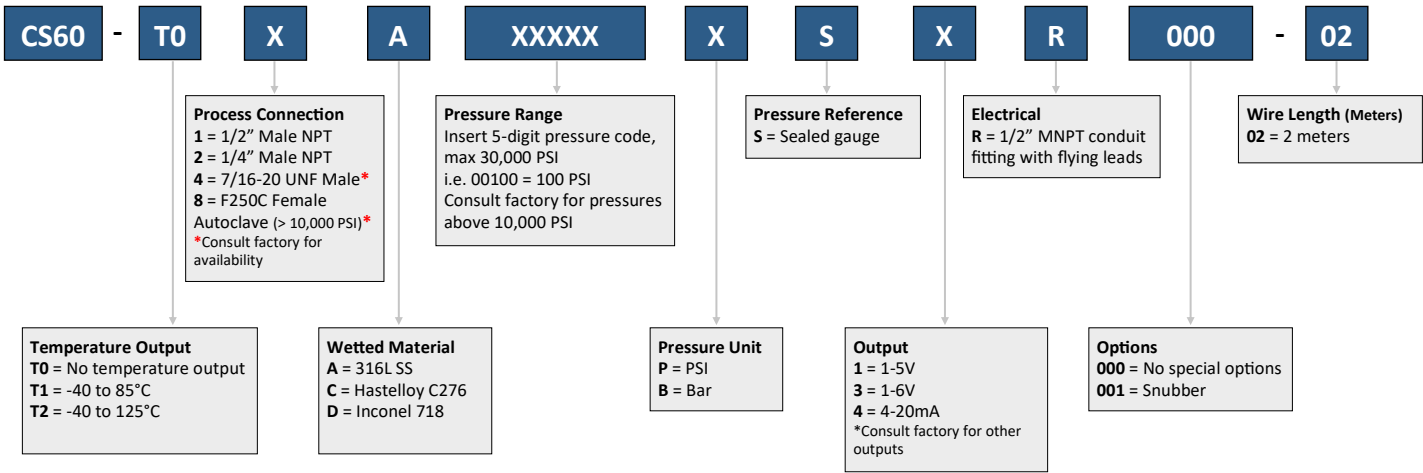

Ordering Examples:
 CS60-T01A00500PS1R000-02 (No temp, 1/2" Male NPT, 316L SS, 0-500 PSI sealed gauge, 1-5V output, 1/2" MNPT conduit fitting with flying leads, 2 meter flying leads)
 CS60-T22C03000PS4R000-02 (-40 to 125°C temperature output, 1/4" Male NPT, Hastelloy C276, 0-3,000 PSIS, 4-20mA outputs, 1/2" MNPT conduit fitting with flying leads, 2 meter flying leads)

Not all configurations are available. Our sales team can recommend the closest available configuration based on your requirements. Contact Core Sensors for configurations not shown. Visit our [How To Buy](#) page or [contact us](#) for a quote.

****Disclaimer:** Unless otherwise agreed in writing, Core Sensors products are not authorized for use in applications including medical devices, life support systems, in-flight aerospace, nuclear or any other application where the product failure could result in personal injury or death.



Caution must be taken when installing and operating the CS60 in known Class I, Division 1 hazardous locations. **Please review the Explosion-Proof Operating Instructions prior to installation. Call Core Sensors at (862) 245-2673** if you are unsure about any of the instructions or to request a copy. Operating Instructions and Certificates of Compliance can be downloaded from the CS60 product web page at core-sensors.com.

Warranty information can be found online at core-sensors.com.