

AC Solid State Relay



JPS

SERIES



Features

- Power control SSR type with 75A load current (Max.)
- All-in one box with heat-sink
- Dielectric strength between input and output at 2,500V/1 min.
- DC / AC input
- Built-in varistor

Type Information


J P S - 2 0 7 5 *

Standard load voltage
 2 : 100V, 200V
 4 : 400V

Max. load current
 75 : 75A



Input voltage range
 None : DC3 ~ 32V
 A : AC50 ~ 250V

Characteristics

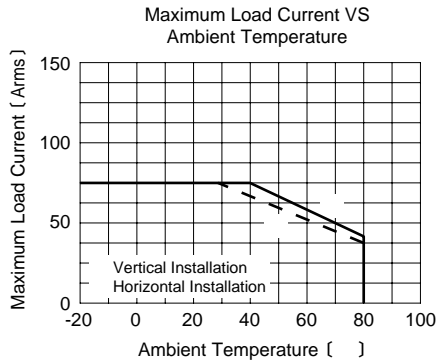

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.


Dimensions (mm)

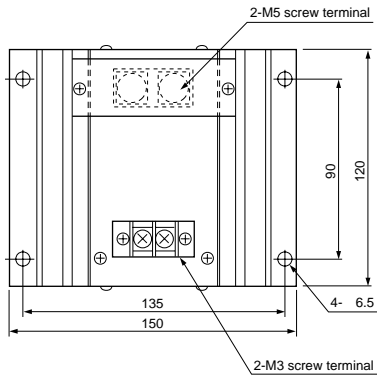


Torque range
 M3 terminal 0.8 N · m (MAX)
 M5 terminal 2.0 N · m (MAX)

Equivalent Circuit

JPS TYPE (DC INPUT)

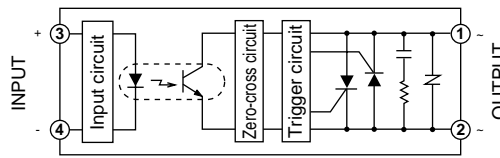


JPS-A TYPE (AC INPUT)

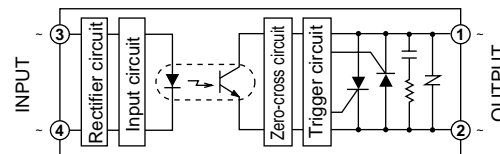


Installation

Vertical Installation



Horizontal Installation



Reduce the rating of load current

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.

Ratings

(Ta = 25)






	Item	Symbols	JPS-2075	JPS-2075A	JPS-4075	JPS-4075A	Units
Output	Rated Load Voltage		120、240		440		V _{ACrms}
	Maximum Load Current	I _{OMAX}	75				A _{ACrms}
	Maximum Load Voltage	V _{OMAX}	264		484		V _{ACrms}
	Peak Non Repetitive Off State Voltage	V _{DSM}	423		1080		V
	Peak 1 Cycle Surge Current	I _{SURGE}	720 (50Hz)				A
	Frequency	f	50、60				Hz
Input	Maximum Input Voltage	V _{IMAX}	32	250(V _{ACrms})	32	250(V _{ACrms})	V _{DC}
	Input Impedance	R _{IN}	1500	33000	1500	33000	
General	Dielectric Strength	V _{ISO}	2,500 / 1min. (Between input-output-case)(Rh40 ~ 60 %)				V _{ACrms}
	Isolation Resistance	R _{ISO}	10 ⁸ and above DC500V (Between input-output-case)(Rh40 ~ 60 %)				
	Operating Temperature Range	T _{OPR}	- 20 ~ + 80				
	Storage Temperature Range	T _{STG}	- 30 ~ + 100				

Electrical Characteristics

(Ta = 25)

	Item	Symbols	JPS-2075	JPS-2075A	JPS-4075	JPS-4075A	Units
Output	Load Voltage Range	V _O	50 ~ 264		50 ~ 484		V _{ACrms}
	Off State Leakage Current	I _{LEK}	30 and below (V _O = 200V)		60 and below (V _O = 400V)		mA _{ACrms}
	On State Voltage Drop	V _{SAT}	2.0 and below				V _{ACrms}
	Minimum Load Current	I _{OMIN}	200				mA
Input	Input Voltage Range	V _I	3 ~ 32	50 ~ 250(V _{ACrms})	3 ~ 32	50 ~ 250(V _{ACrms})	V _{DC}
	Operate Voltage	V _P	3 and below	50 and below (V _{ACrms})	3 and below	50 and below (V _{ACrms})	V _{DC}
	Release Voltage	V _D	1 and above	10 and above (V _{ACrms})	1 and above	10 and above (V _{ACrms})	V _{DC}
General	Operate Time	T _{ON}	1/2Cycle + 1ms and below	1.5Cycle + 1ms and below	1/2Cycle + 1ms and below	1.5Cycle + 1ms and below	/
	Release Time	T _{OFF}	1/2Cycle + 1ms and below	1.5Cycle + 1ms and below	1/2Cycle + 1ms and below	1.5Cycle + 1ms and below	/
	Capacitance	C _{IO}	15 and below				PF
	Zero Cross Turn On		Built In				/
	Approved Standards						/

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.

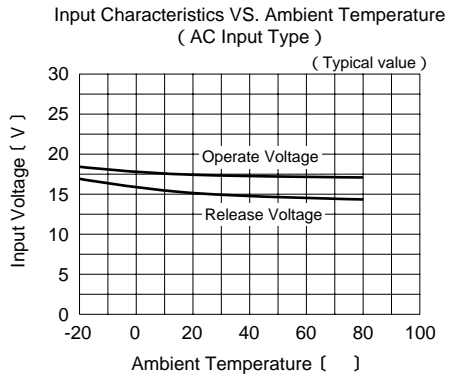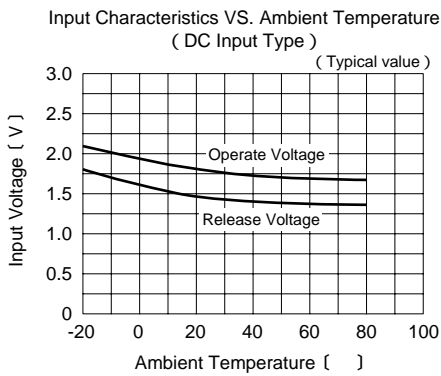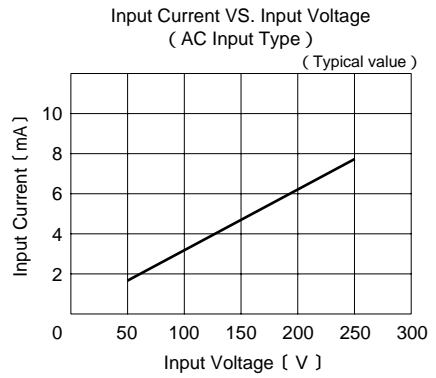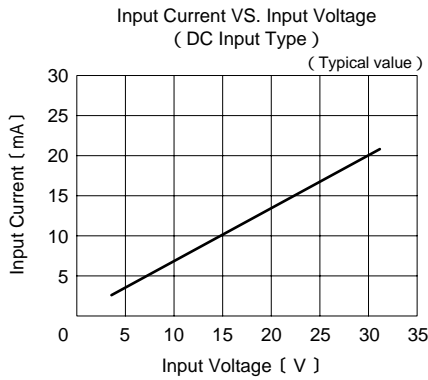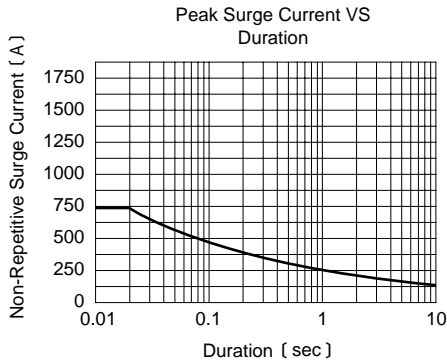

Description in the catalogue is subject to change without notice. Please read the specifications thoroughly before using. Please contact JEL SYSTEM for further information.