




With its ultra-compact design the SM1 is the perfect solution when tight space is an issue. At just a little over an inch across, this miniature stringpot offers full stroke measurement ranges from 2½ to 25 inches. A precision plastic hybrid 10K-ohm potentiometer delivers a precise voltage divider output signal that is linearly proportional to the travel of the spring-loaded measuring cable.

Constructed with a rugged polycarbonate enclosure and free-release tolerant, the SM1 is the perfect solution for the OEM and single piece user alike.

### **Output Signal**

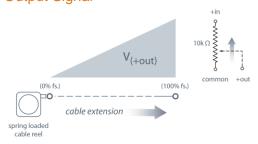

# SM<sub>1</sub>

# Miniature String Pot • Voltage Divider

Linear Position to 25 inches (635 mm)

Fits In Tight Spaces • Handy Mounting Bracket

Polycarbonate Enclosure • Free Release Tolerant

In Stock for Quick Delivery!

#### **Specifications**

Available Stroke Ranges 2.5, 7.5, 12.5, 25 inches

Output Signal voltage divider (potentiometric)

Accuracy .25% to 1% FS. (see ordering info)

Repeatability .05% FS.

**Resolution** essentially infinite

Measuring Cable .014-inch dia. nylon-coated stainless steel

Maximum Acceleration15 g (retraction)Measuring Cable Tension5.1 oz. (1,4 N) ±30%

Sensor plastic-hybrid precision potentiometer

Input Resistance 10K ohms, ±10%

Power Rating, Watts 2.0 at 70°F derated to 0 at 250°F

Recommended Maximum 30 V (AC/DC)

Input Voltage

Output Signal Change Over

Full Stroke Range

Cycle Life see ordering information

Electrical Connection solder terminals, directly to potentiometer

94% ±4% of V(+in)

**Enclosure** glass-filled polycarbonate

Environmental IP 50

Operating Temperature 0° to 160° F (-18° to 70° C)

Weight (not including 3 oz (90 g)

bracket)

# Optional Universal Mounting Kit


Available as an optional accessory, this universal-style mounting bracket replaces the standard bracket to give added mounting flexibility.


It's easy to install and the mounting kit comes with the bracket and all of the screws needed to attach it to the sensor.

See fig. 3 for further details.


Order No: #9604300-0000


Fig. 1 - Outline Drawing (w/o mounting bracket)





\*tolerance = +.005 -.001 [+.13 -.03] \*\*tolerance = +.005 -.005 [+.13 -.13]

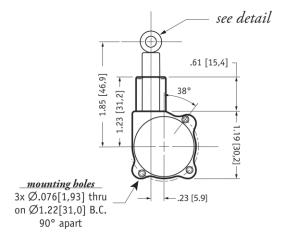



INCHES [MM]

#### **Electrical Connection**


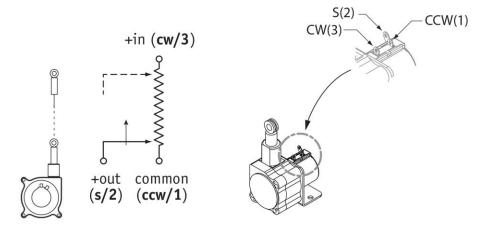


Fig. 2 - Outline Drawing (w/standard bracket)

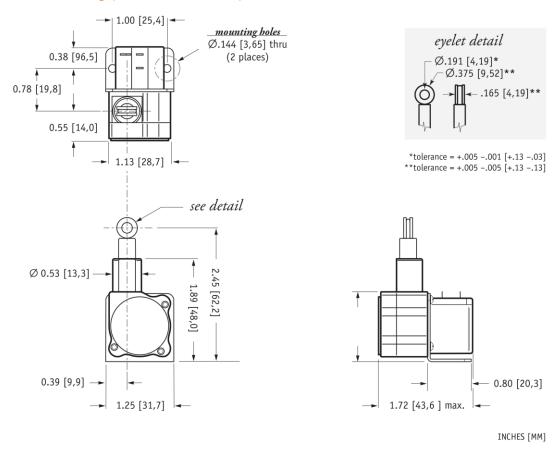

## **Mounting Options**



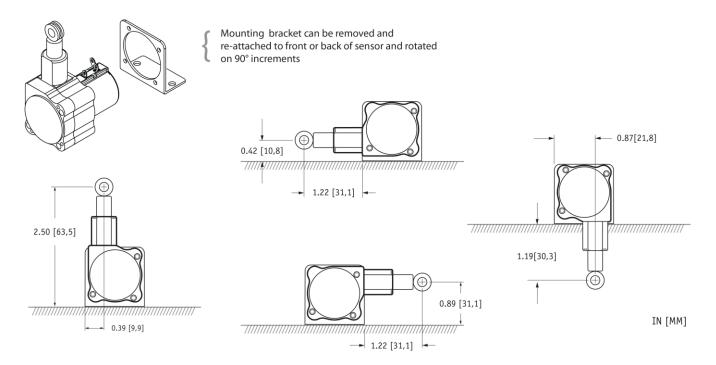



Fig 3 - Outline Drawing (w/optional Universal Mounting Bracket)

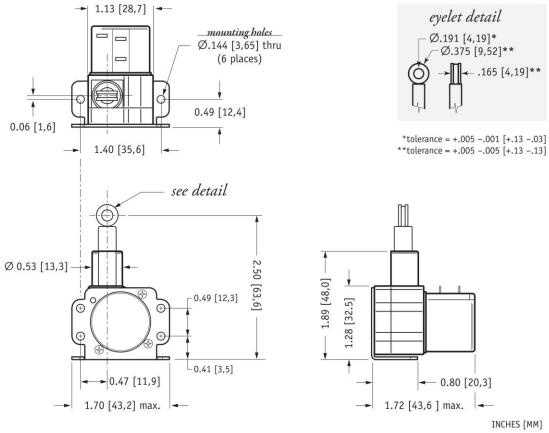

## Mounting Options for Universal Mounting Bracket

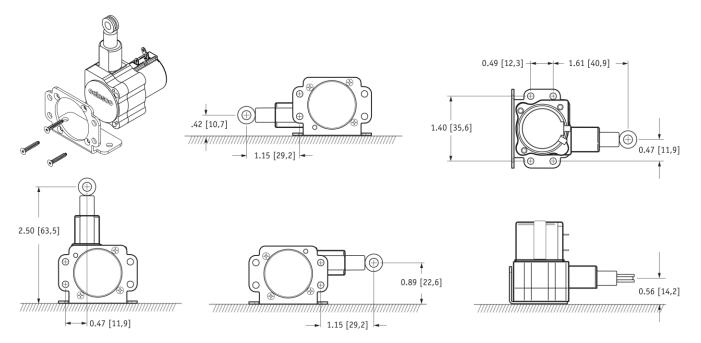

### **Ordering Information**

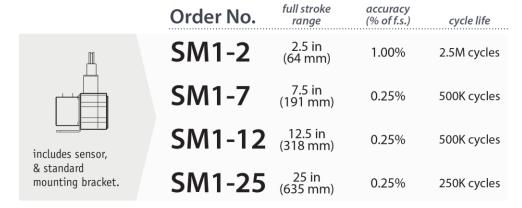

ı

### **NORTH AMERICA**

info@celesco.com

Measurement Specialties, Inc., a TE Connectivity company 20630 Plummer Street Chatsworth, CA 91311 Tel +1 800 423 5483 Tel +1 818 701 2750 Fax +1 818 701 2799

## TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.

SM1 12/01/2015