

The NewTek GER Series Gage Head LVDTs are designed to work with DC voltage, and have excellent linearity, high sensitivity and high resolution. They permit highly accurate readout and recording of an output signal directly without auxiliary signal conditioning electronics. Electrical connection is made through a radially mounted connector, resulting in a reduced housing length. These GER Series spring-loaded LVDTs are designed for a wide range of position measurement and dimensional gaging applications and available in ranges of 0.10 inch (2.5mm) to 4 inches (100mm).

Features

- Spring loaded probe
- Radially mounted connector
- Welded 3/4 inch hermetically sealed steel housing
- Measurement ranges from 0.10 to 4 inches
- Linearity $\pm 0.15\%$ of Full Range Typical
- Shock and vibration tolerant
- Choice of probe contact tips
- Standard and custom models available

Electrical Specifications

Input Power:	24VDC, 25mA Nominal
Full Scale Output:	0 to 10VDC
Linearity:	$\pm 0.15\%$ Full Range Typical
Hysteresis:	$< 0.01\%$ of Full of FSO Typical
Repeatability:	$< 0.01\%$ of Full Range Typical

Environmental Specifications


Operating Temperature:	0°F to 185° F (-20°C to 85°C)
Thermal Coefficient:	$< -0.014\%/^{\circ}\text{F}$ ($< -0.025\%/^{\circ}\text{C}$) of Full Range
Humidity:	90% R.H., 240 l of FSO Typical
Shock Survival:	1000 g, 11 ms
Vibration:	20 g to 2 KHz

Materials Specifications

Housing:	Corrosion-resistant nickel-iron alloy
Core:	Hi-permeability nickel-iron alloy
Magnet Wire:	Film insulated copper
Connector:	PT02A-10-6P
Probe:	AGD #9 contact tip

Applications


- Pinch and roller alignment
- Dimensional gaging
- Factory automation
- Materials testing
- Packaging equipment
- TIR measurements

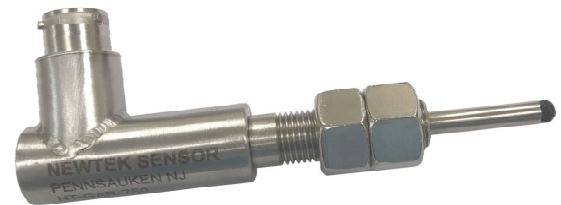

Specifications

Model	NT-GER-750-100	NT-GER-750-250	NT-GER-750-500	NT-GER-750-1000	NT-GER-750-2000	NT-GER-750-4000
Parameter						
Nominal Range (inches)	0.10	0.25	0.50	1.0	2.0	4.0
Nominal Range (mm)	2.5	6.3	12.5	25.0	50.0	100.0
Scale Factor (V/inch)	100	40	20	10	5.0	2.5
Scale Factor V/mm)	4.0	1.6	0.8	0.4	0.2	0.1
Dimension " A" (inches)	5.45	6.05	6.85	11.35	13.80	21.75
Dimension " B" (inches)	4.35	5.00	5.70	9.85	11.35	17.19
Dimension " C" (inches)	2.80	3.45	4.15	6.75	8.15	11.71
Body Weight (ounces)	3.0	3.5	4.1	6.5	6.9	10.5
Body Weight (grams)	83	101	171	182	298	296

Dimensions and Wiring

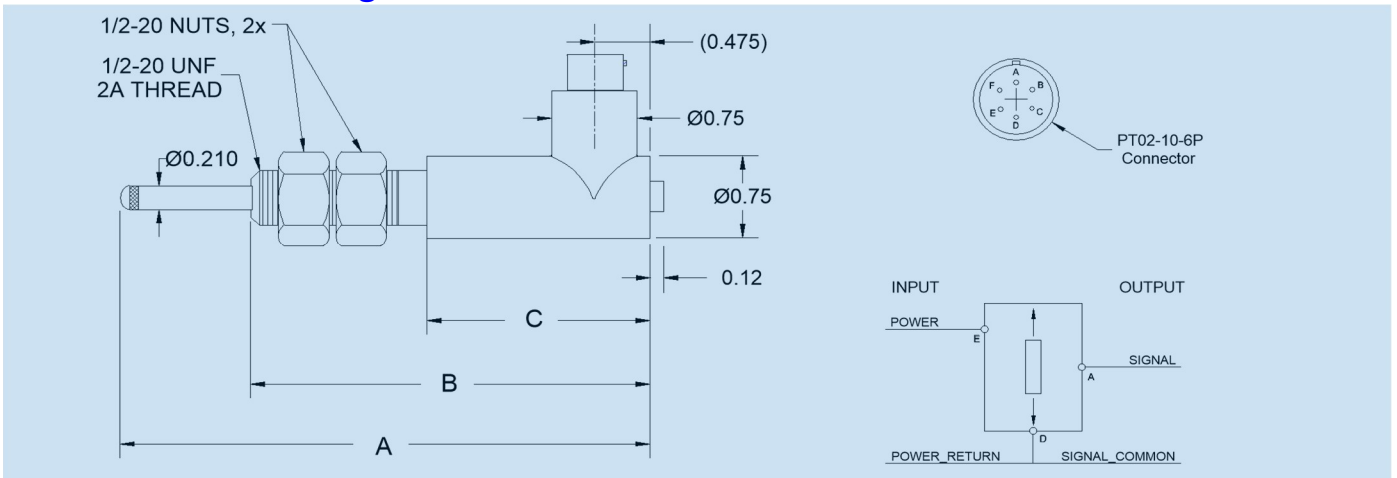

Ordering Info

NT – GER – 750 – xxx – xxx

Gage Head ±10V Out LVDT

Range (See Table)

Options Consult factory

Notes:

- Additional options and alternate contact tips are available. Please consult factory for custom designs.
- Specifications subject to change.

Warranty

NewTek products are warranted against defective materials and workmanship for a period of one year from the date of delivery to the original purchaser. NewTek accepts no liability for damages in the misuse of our products.



NewTek Sensor Solutions, LLC
7300 US Route 130 North, Bld # 7
Pennsauken, NJ 08110-1541 USA
Tel: (856) 406-6877 Fax: (856) 406-6578
www.newteksensors.com